


## Peripheral Pump, Type PB

- ✓ Available in Polypropylene (PP), PVDF, Polyethylene (HDPE) and PTFE
- ✓ Flow capacity up to 6 m<sup>3</sup>/hr
- ✓ Available in size 25-100mm

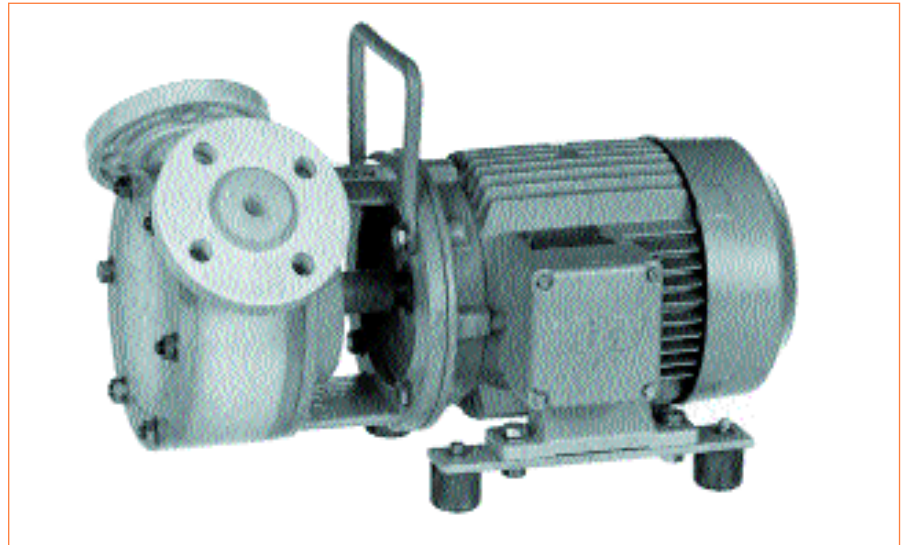

With the PB it is possible to reach relatively high pressure head together with low flow-capacity - see characteristic curve.

- Peripheral pumps have symmetrical impellers, therefore they are independent of the direction of rotation and may be operate cw or ccw.
- Peripheral pumps handle low viscosity, neutral or aggressive liquids or mixed fluids as well as gas or air impurities in the liquid without affecting the pump characteristic.
- Shaft sealing is by single or double acting mechanical seal on a corrosion resistant shaft sleeve.

