

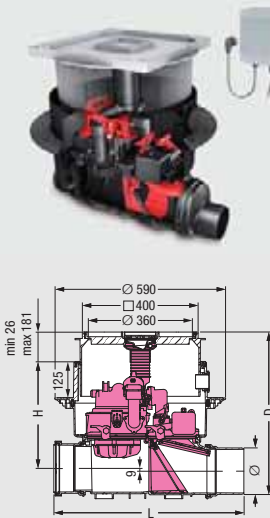
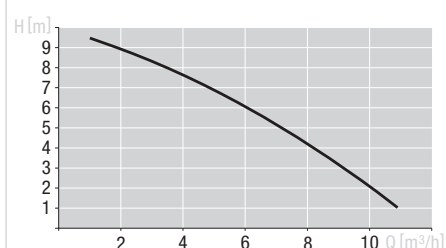
Backwater pumping stations for wastewater with or without sewage

Backwater
protection

1

Pumpfix F Komfort Installation in a concrete slab/floor

Products

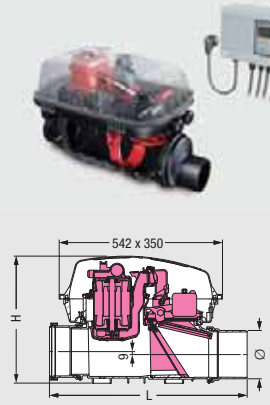
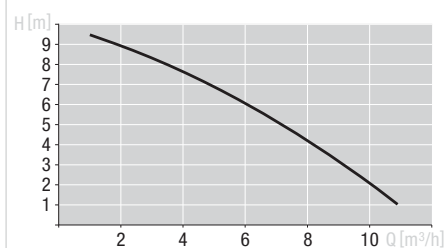
Illustration and dimensioned drawing	Article description	Outer diameter Ø (mm)	Article #
 <p>Installation area 750 x 750 mm</p>	<p>Backwater pumping station <i>Pumpfix F Komfort</i> for wastewater with or without sewage made of polymer, with telescopic upper section for continuous height- and level adjustment</p> <p>For installation in a concrete slab/floor for installation depth (D) from 486 - 640 mm</p> <p>1 with recessed cover for on-site tiling and drain (X)</p> <p>2 with black cover and drain (S)</p> <p>With surface water tight cover plate class A 15 made of polymer and integrated floor drain. Installation kit with choice of cover.</p> <p>Backwater pumping station according to EN 13564 Type 3 with pump (1kW/230V) and backwater valve, pump activates during backwater, suitable for wastewater with or without sewage. Plug-and-Play control unit with connection option to building management system and alarm, display for operating status and battery back-up, protection type IP 54, with integrated self diagnosis system SDS, motorized backwater flap, <i>Pumpfix F</i> body rated protection type IP 68 (3 m, 24 h). Power cable length: 5 m (15 m available on request).</p> <p>Ø 110 L: 642 mm H: 394 mm Ø 125 L: 645 mm H: 387 mm Ø 160 L: 656 mm H: 370 mm Ø 200 L: 720 mm H: 348 mm</p>	<p>1</p> <p>Ø 110 Ø 125 Ø 160 Ø 200*</p> <p>2</p> <p>Ø 110 Ø 125 Ø 160 Ø 200*</p>	<p>24100X 24125X 24150X 24200X</p> <p>24100S 24125S 24150S 24200S</p>
		<p>+ Accessories: Page 30 - 33</p>	



Certification: Z-53.2-388

Pumpfix F Komfort Installation in an exposed wastewater pipe

Products

	<p>Backwater pumping station <i>Pumpfix F Komfort</i> for wastewater with or without sewage made of polymer</p> <p>For installation in an exposed wastewater pipe. With protective cover.</p> <p>Backwater pumping station according to EN 13564 Type 3 with pump (1kW/230V) and backwater valve, pump activates during backwater, suitable for wastewater with or without sewage. Plug-and-Play control unit with connection option to building management system and alarm, display for operating status and battery back-up, protection type IP 54, with integrated self diagnosis system SDS, motorized backwater flap, <i>Pumpfix F</i> body rated protection type IP 68 (3 m, 24 h). Power cable length: 5 m (15 m available on request).</p> <p>Ø 110 L: 642 mm H: 422 mm Ø 125 L: 645 mm H: 422 mm Ø 160 L: 656 mm H: 422 mm Ø 200 L: 720 mm H: 422 mm</p>	<p>Ø 110 Ø 125 Ø 160 Ø 200*</p>	<p>24100 24125 24150 24200</p>
		<p>+ Accessories: Page 30 - 33</p>	



Certification: Z-53.2-388

Backwater pumping stations for wastewater with or without sewage

Installation example *Pumpfix F Komfort*



Pumpfix F ① pumps against backwater and discharges surface water. It protects draining elements such as shower, sink, washing machine and outside steps down to the basement which are below the backwater level. The wastewater is discharged continually and without the use of energy to the sewer through gravity. In the event of backwater, reliable draining still takes place since the pump activates and pumps the building's wastewater into the surcharged sewer. Control is by means of the Comfort control unit ② with self-diagnosis system SDS. The sealing gasket set ③ Art. # 83023 makes installation in waterproof concrete possible.

Professional advantages

- **Plug & play Comfort control unit** with self-diagnosis system SDS for maximum safety.

- **Integrated drain function to drain surface water.**



- **Variable upper section** rotatable, tiltable and height adjustable

- **Installation in waterproof concrete.** Gasket set to prevent groundwater infiltration.



- Installation body with only 9 mm gradient. Ideal for renovation work.



Scan this QR code to directly view the corresponding product video.



Installation example *Pumpfix F Komfort*



Function and range of application are identical to the system described above. The installation of the *Pumpfix F* ① is even easier in this case if the wastewater pipe is routed exposed across the basement floor. The Comfort control unit ② with SDS is part of the scope of supply here, too, so that safe system operation is guaranteed at all times. A low-cost investment for backwater protection in the basement compared with the property and building damage caused by basements flooded by backwater.


Professional advantages

- **Plug & play Comfort control unit** with self-diagnosis system SDS for maximum safety.


- Installation body with only 9 mm gradient. Ideal for renovation work.

- **Fully open pipe passage** with open backwater flap during normal conditions, flap is automatically closed with motor during backwater

- **Function**



Normal mode:
Water drains
with gravity



Backwater:
Backwater flap
is closed



Pump activates,
wastewater
is discharged