


PVCC Flanges Inch Sizes Stub & Backing Ring

Plain Spigot - Drilled ANSI 150

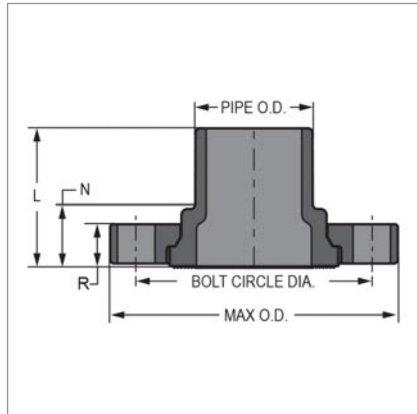

Size	Code	L	N	R	P.C.D.	No. of Bolt Holes	Bolt Size	Min. Bolt Length	Max O.D.	Approx Wt. (grams)
1/2	856-005C	44.45	23.02	13.49	60.33	101.60	12.70	50.80	88.90	90.00
3/4	856-007C	49.21	24.60	14.29	69.85	101.60	12.70	50.80	98.43	130.50
1	856-010C	55.56	26.19	15.88	79.38	101.60	12.70	57.15	107.95	175.50
1 1/4	856-012C	59.53	27.78	17.46	88.90	101.60	12.70	57.15	117.48	225.00
1 1/2	856-015C	66.68	32.54	19.05	98.43	101.60	12.70	63.50	127.00	270.00
2	856-020C	73.03	34.13	20.64	120.65	101.60	15.88	76.20	152.40	423.00
2 1/2	856-025C	77.79	32.54	25.40	139.70	101.60	15.88	82.55	177.80	580.50
3	856-030C	85.73	36.51	26.99	152.40	101.60	15.88	82.55	190.50	819.00
4	856-040C	98.43	41.28	31.75	190.50	203.20	15.88	88.90	228.60	1,318.50
6	856-060C	120.65	45.24	32.54	241.30	203.20	19.05	101.60	279.40	2,079.00
8	856-080C	149.23	49.21	34.93	298.45	203.20	19.05	114.30	342.90	3,577.50
10	856-100C	203.20	57.15	41.28	361.95	304.80	22.23	127.00	406.40	7,024.50
12	856-120C	215.90	55.56	41.28	431.80	304.80	22.23	127.00	482.60	9,589.50

Van Stone Style Plastic Backing Ring

Please note: This information is based on current manufacturers details, and is subject to change without notification.