


## Fittings for Socket Welding

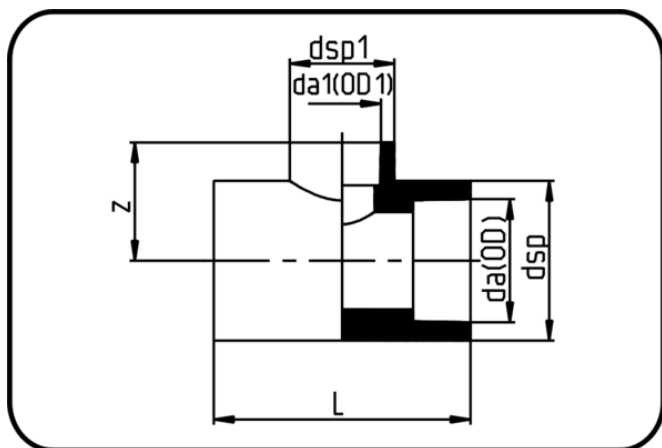

Code: 055

- Tee reduced
- injection moulded
- Socket-welding
- PPR grey

Dimension	Code	Detail	da(OD) mm	da1(OD 1) mm	z mm	L mm	dsp mm	dsp1 mm	Weight
25/20	11.055.2520.07	25/20 - MOP 20 bar	25	20	35,5	70	34,8	35	0.045
32/20	11.055.3220.07	32/20 - MOP 20 bar	32	20	39,8	79,7	43	29,9	0.062
32/25	11.055.3225.07	32/25 - MOP 20 bar	32	25	40	80	43	35	0.062
40/20	11.055.4020.07	40/20 - MOP 20 bar	40	20	46	92	53	30	0.098
40/25	11.055.4025.07	40/25 - MOP 20 bar	40	25	46,8	92	53,2	35,3	0.1
40/32	11.055.4032.07	40/32 - MOP 20 bar	40	32	45	92	53	43	0.102
50/20	11.055.5020.07	50/20 - MOP 20 bar	50	20	50	108,5	65,4	30	0.158
50/25	11.055.5025.07	50/25 - MOP 20 bar	50	25	51	108,5	65,5	35,5	0.16
50/32	11.055.5032.07	50/32 - MOP 20 bar	50	32	54	108	65	43	0.163
50/40	11.055.5040.07	50/40 - MOP 20 bar	50	40	52,5	107	65	53	0.17
63/25	11.055.6325.07	63/25 - MOP 20 bar	63	25	65	130	81	36	0.32
63/32	11.055.6332.07	63/32 - MOP 20 bar	63	32	65	129,5	81	43,5	0.318
63/40	11.055.6340.07	63/40 - MOP 20 bar	63	40	65	129,5	81	53	0.319
63/50	11.055.6350.07	63/50 - MOP 20 bar	63	50	65	129,5	81	66	0.324