


Fittings with short Spigot

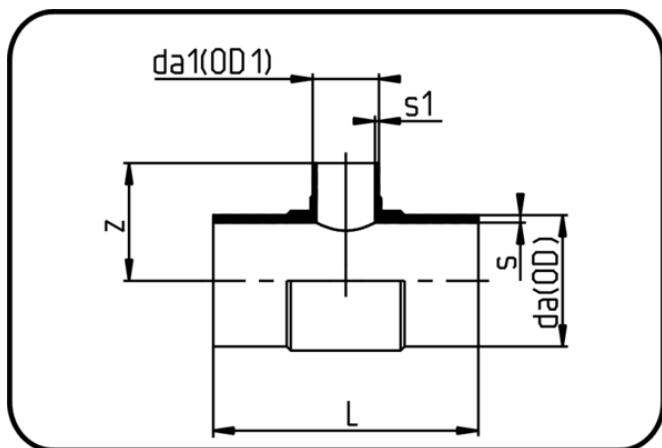

Code: 016

- Tee reduced
- short spigot
- injection moulded
- Butt-welding
- PPR grey

Dimension	Code	Detail	da(OD) mm	da1(OD 1) mm	s mm	z mm	L mm	s1 mm	Weight
140/63	11.016.1463.17	140/63 SDR17 ISO S-8	140	63	8,3	120	302	3,8	1.311
140/75	11.016.1475.17	140/75 SDR17 ISO S-8	140	75	8,3	130	300	4,5	1.4
140/90	11.016.1490.17	140/90 SDR17 ISO S-8	140	90	8,3	130	300	5,4	1.32
140/110	11.016.1411.17	140/110 SDR17 ISO S-8	140	110	8,3	139	300	6,6	1.64
160/125	11.016.1612.17	160/125 SDR17 ISO S-8	160	125	9,5	150	315	7,4	2.04
180/63	11.016.1863.17	180/63 SDR17 ISO S-8	180	63	10,7	139	358	3,8	2.06
180/75	11.016.1875.17	180/75 SDR17 ISO S-8	180	75	10,7	140	360	4,5	2.1
180/110	11.016.1811.17	180/110 SDR17 ISO S-8	180	110	10,7	160	365	6,6	2.16
180/125	11.016.1812.17	180/125 SDR17 ISO S-8	180	125	10,7	156	365	7,4	2.24
225/125	11.016.2212.17	225/125 SDR17 ISO S-8	225	125	13,4	180	455	7,4	4.19
63/32	11.016.6332.11	63/32 SDR11 ISO S-5	63	32	5,8	70	130	2,9	0.182
90/32	11.016.9032.11	90/32 SDR11 ISO S-5	90	32	8,2	85	213	2,9	0.562
90/50	11.016.9050.11	90/50 SDR11 ISO S-5	90	50	8,2	90	213	4,6	0.563
110/32	11.016.1132.11	110/32 SDR11 ISO S-5	110	32	10	94	244	2,9	0.906
110/50	11.016.1150.11	110/50 SDR11 ISO S-5	110	50	10	103	244	4,6	0.945
125/63	11.016.1263.11	125/63 SDR11 ISO S-5	125	63	11,4	112	280	5,8	1.4
140/63	11.016.1463.11	140/63 SDR11 ISO S-5	140	63	12,7	120	302	5,8	1.8
140/75	11.016.1475.11	140/75 SDR11 ISO S-5	140	75	12,7	130	305	6,8	1.92
140/90	11.016.1490.11	140/90 SDR11 ISO S-5	140	90	12,7	130	305	8,2	1.84
140/110	11.016.1411.11	140/110 SDR11 ISO S-5	140	110	12,7	141	305	10	2.18
160/125	11.016.1612.11	160/125 SDR11 ISO S-5	160	125	14,6	158	335	11,4	2.72
180/63	11.016.1863.11	180/63 SDR11 ISO S-5	180	63	16,4	144	367	5,8	3.04
180/75	11.016.1875.11	180/75 SDR11 ISO S-5	180	75	16,4	148	366	6,8	3.1

Dimension	Code	Detail	da(OD) mm	da1(OD 1) mm	s mm	z mm	L mm	s1 mm	Weight
180/125	11.016.1812.11	180/125 SDR11 ISO S-5	180	125	16,4	166	366	11,4	3.28
225/125	11.016.2212.11	225/125 SDR11 ISO S-5	225	125	20,5	178	456	11,4	6.12