


Elongated Fittings

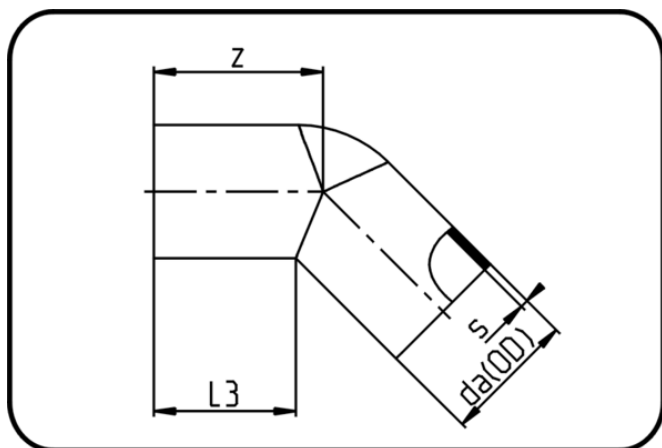

Code: 060

- Elbow 45°
- long spigot
- injection moulded
- Butt + E-socket-welding
- PPR grey

| Dimension | Code | Detail | da(OD) mm | s mm | z mm | L3 mm | Weight |
|-----------|----------------|------------------------|--------------|---------|---------|----------|--------|
| 63 | 11.060.0063.17 | 63X3,8 SDR17 ISO S-8 | 63 | 3,8 | 80 | 66 | 0.11 |
| 75 | 11.060.0075.17 | 75X4,5 SDR17 ISO S-8 | 75 | 4,5 | 90 | 70 | 0.175 |
| 90 | 11.060.0090.17 | 90X5,4 SDR17 ISO S-8 | 90 | 5,4 | 101 | 79 | 0.28 |
| 110 | 11.060.0110.17 | 110X6,6 SDR17 ISO S-8 | 110 | 6,6 | 112 | 82 | 0.48 |
| 125 | 11.060.0125.17 | 125X7,4 SDR17 ISO S-8 | 125 | 7,4 | 130,5 | 99,5 | 0.67 |
| 140 | 11.060.0140.17 | 140X8,3 SDR17 ISO S-8 | 140 | 8,3 | 137 | 102 | 0.847 |
| 160 | 11.060.0160.17 | 160X9,5 SDR17 ISO S-8 | 160 | 9,5 | 156,5 | 116,5 | 1.28 |
| 180 | 11.060.0180.17 | 180X10,7 SDR17 ISO S-8 | 180 | 10,7 | 160,5 | 121 | 1.74 |
| 200 | 11.060.0200.17 | 200X11,9 SDR17 ISO S-8 | 200 | 11,9 | 175 | 132,5 | 2.34 |
| 225 | 11.060.0225.17 | 225X13,4 SDR17 ISO S-8 | 225 | 13,4 | 186 | 128 | 3.23 |
| 250 | 11.060.0250.17 | 250X14,8 SDR17 ISO S-8 | 250 | 14,8 | 217 | 160 | 4.76 |
| 280 | 11.060.0280.17 | 280X16,6 SDR17 ISO S-8 | 280 | 16,6 | 237 | 175 | 6.2 |
| 315 | 11.060.0315.17 | 315X18,7 SDR17 ISO S-8 | 315 | 18,7 | 251 | 180 | 8.44 |
| 20 | 11.060.0020.11 | 20X1,9 SDR11 ISO S-5 | 20 | 1,9 | 44 | 39 | 0.01 |
| 25 | 11.060.0025.11 | 25X2,3 SDR11 ISO S-5 | 25 | 2,3 | 48 | 42 | 0.016 |
| 32 | 11.060.0032.11 | 32X2,9 SDR11 ISO S-5 | 32 | 2,9 | 57 | 49 | 0.033 |
| 40 | 11.060.0040.11 | 40X3,7 SDR11 ISO S-5 | 40 | 3,7 | 63 | 53 | 0.051 |
| 50 | 11.060.0050.11 | 50X4,6 SDR11 ISO S-5 | 50 | 4,6 | 70 | 57 | 0.08 |
| 63 | 11.060.0063.11 | 63X5,8 SDR11 ISO S-5 | 63 | 5,8 | 80 | 67 | 0.17 |
| 75 | 11.060.0075.11 | 75X6,8 SDR11 ISO S-5 | 75 | 6,8 | 90 | 72,5 | 0.259 |
| 90 | 11.060.0090.11 | 90X8,2 SDR11 ISO S-5 | 90 | 8,2 | 104 | 82 | 0.423 |
| 110 | 11.060.0110.11 | 110X10,0 SDR11 ISO S-5 | 110 | 10 | 114 | 85 | 0.66 |
| 125 | 11.060.0125.11 | 125X11,4 SDR11 ISO S-5 | 125 | 11,4 | 132,5 | 99,5 | 1.015 |
| | | | | | | | |

| Dimension | Code | Detail | da(OD) mm | s mm | z mm | L3 mm | Weight |
|-----------|----------------|------------------------|--------------|---------|---------|----------|--------|
| 140 | 11.060.0140.11 | 140X12,7 SDR11 ISO S-5 | 140 | 12,7 | 132,5 | 100 | 1.34 |
| 160 | 11.060.0160.11 | 160X14,6 SDR11 ISO S-5 | 160 | 14,6 | 152,5 | 116,5 | 1.98 |
| 180 | 11.060.0180.11 | 180X16,4 SDR11 ISO S-5 | 180 | 16,4 | 158,5 | 120,5 | 2.54 |
| 200 | 11.060.0200.11 | 200X18,2 SDR11 ISO S-5 | 200 | 18,2 | 170,5 | 120,5 | 3.44 |
| 225 | 11.060.0225.11 | 225X20,5 SDR11 ISO S-5 | 225 | 20,5 | 185 | 133 | 4.59 |
| 250 | 11.060.0250.11 | 250X22,7 SDR11 ISO S-5 | 250 | 22,7 | 217 | 160 | 6.76 |
| 280 | 11.060.0280.11 | 280X25,4 SDR11 ISO S-5 | 280 | 25,4 | 235 | 173 | 8.94 |
| 315 | 11.060.0315.11 | 315X28,6 SDR11 ISO S-5 | 315 | 28,6 | 250 | 179 | 12.26 |