


Elongated Fittings

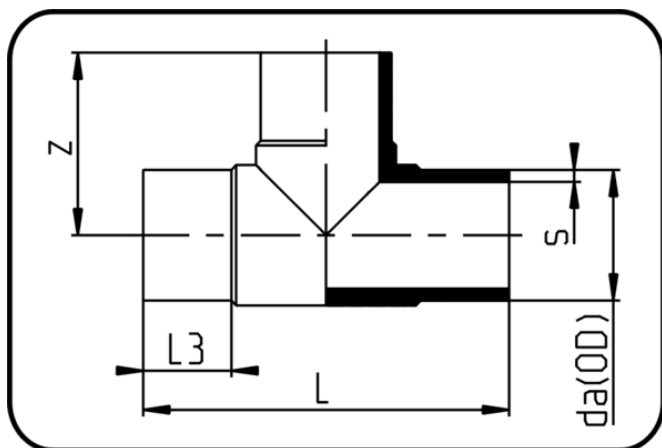

Code: 066

- Tee
- long spigot
- injection moulded
- Butt + E-socket-welding
- PE 100-RC black

Dimension	Code	Detail	da(OD) mm	s mm	z mm	L mm	L3 mm	Weight
63	70.066.0063.17	63X3,8 SDR17 ISO S-8	63	3,8	113	222	63	0.285
75	70.066.0075.17	75X4,5 SDR17 ISO S-8	75	4,5	131	258	70	0.478
90	70.066.0090.17	90X5,4 SDR17 ISO S-8	90	5,4	140	280	79	0.696
110	70.066.0110.17	110X6,6 SDR17 ISO S-8	110	6,6	156	313	84	1.154
125	70.066.0125.17	125X7,4 SDR17 ISO S-8	125	7,4	174	350	90	1.65
140	70.066.0140.17	140X8,3 SDR17 ISO S-8	140	8,3	190	380	95	2.12
160	70.066.0160.17	160X9,5 SDR17 ISO S-8	160	9,5	204,5	401	98	3
180	70.066.0180.17	180X10,7 SDR17 ISO S-8	180	10,7	260	521	134	5.22
200	70.066.0200.17	200X11,9 SDR17 ISO S-8	200	11,9	246	492	112	6
225	70.066.0225.17	225X13,4 SDR17 ISO S-8	225	13,4	270	540	120	8.12
250	70.066.0250.17	250X14,8 SDR17 ISO S-8	250	14,8	314	624	146	11.56
280	70.066.0280.17	280X16,6 SDR17 ISO S-8	280	16,6	347	694	158	15.5
315	70.066.0315.17	315X18,7 SDR17 ISO S-8	315	18,7	375	750	166	21.14
355	70.066.0355.17	355X21,1 SDR17 ISO S-8	355	21,1	440	880	188	32.3
400	70.066.0400.17	400X23,7 SDR17 ISO S-8	400	23,7	470	940	200	41.28
20	70.066.0020.11	20X3,0 SDR11 ISO S-5	20	3	54,5	107	34,5	0.029
25	70.066.0025.11	25X3,0 SDR11 ISO S-5	25	3	59	117	39	0.042
32	70.066.0032.11	32X3,0 SDR11 ISO S-5	32	3	71	144	44	0.067
40	70.066.0040.11	40X3,7 SDR11 ISO S-5	40	3,7	84	165	50	0.117
50	70.066.0050.11	50X4,6 SDR11 ISO S-5	50	4,6	95	189	56	0.199
63	70.066.0063.11	63X5,8 SDR11 ISO S-5	63	5,8	114	226	64	0.35
75	70.066.0075.11	75X6,8 SDR11 ISO S-5	75	6,8	128	260	70	0.639
90	70.066.0090.11	90X8,2 SDR11 ISO S-5	90	8,2	143	286	79	0.96

Dimension	Code	Detail	da(OD) mm	s mm	z mm	L mm	L3 mm	Weight
110	70.066.0110.11	110X10,0 SDR11 ISO S-5	110	10	158	317	85	1.547
125	70.066.0125.11	125X11,4 SDR11 ISO S-5	125	11,4	177	356	91	2.21
140	70.066.0140.11	140X12,7 SDR11 ISO S-5	140	12,7	190	380	96,5	2.88
160	70.066.0160.11	160X14,6 SDR11 ISO S-5	160	14,6	202,5	405	99	4.1
180	70.066.0180.11	180X16,4 SDR11 ISO S-5	180	16,4	260	521	136	6.9
200	70.066.0200.11	200X18,2 SDR11 ISO S-5	200	18,2	245	490	112	7.92
225	70.066.0225.11	225X20,5 SDR11 ISO S-5	225	20,5	271	548	124	10.85
250	70.066.0250.11	250X22,7 SDR11 ISO S-5	250	22,7	310	622	147	15.06
280	70.066.0280.11	280X25,4 SDR11 ISO S-5	280	25,4	347	694	158	20.86
315	70.066.0315.11	315X28,6 SDR11 ISO S-5	315	28,6	375	752	168	28.46
355	70.066.0355.11	355X32,2 SDR11 ISO S-5	355	32,2	437	874	188	42.68
400	70.066.0400.11	400X36,3 SDR11 ISO S-5	400	36,3	470	940	198	56.46
63	70.066.0063.07	63X8,6 SDR7,4 ISO S-3,2	63	8,6	111	219	63	0.489
90	70.066.0090.07	90X12,3 SDR7,4 ISO S-3,2	90	12,3	141	284	79	1.276
110	70.066.0110.07	110X15,1 SDR7,4 ISO S-3,2	110	15,1	158	315	82	2.08
125	70.066.0125.07	125X17,1 SDR7,4 ISO S-3,2	125	17,1	171,5	342	89,5	2.873
160	70.066.0160.07	160X21,9 SDR7,4 ISO S-3,2	160	21,9	203	405	99	5.48
200	70.066.0200.07	200X27,4 SDR7,4 ISO S-3,2	200	27,4	247	495	115	11.1
225	70.066.0225.07	225X30,8 SDR7,4 ISO S-3,2	225	30,8	268,5	542	120	14.7