

Grease separator *EasyClean* free Mix & Pump NS 15 – 30
for free-standing installation



Tank

Manufactured from virgin, non-recycled polyethylene, for free-standing installation in frost-protected areas, with integrated sludge trap and sloped surfaces for fast and clean disposal, with two domed covers made of polymer, with quickrelease closures, sealed odour-tight, with suction device installed for the joint disposal of contents of sludge trap and grease separator chamber, intake pipe 75 mm OD PN 10 in accordance with DIN 2501, Storz-B coupling R 2 1/2 for connection to the disposal vehicle. Viewing window with wiper. Inlet and outlet Ø 200 / 250 mm for the connection to PE-HD pipes according to DIN 19537, HT pipes according to DIN 19560, PP or AS.

Disposal System

Mix & Pump with manual disposal and rinsing device and Shredder-Mix-System, KESSEL disposal system Mix & Pump with switching distribution, mixing and rinsing device via jet and conic nozzles, external pump(s), with integrated chopping mechanism and closure valve, pumping capacity 3.0 kW, 5 m cable length, refill inlet in accordance with DIN 1988.

Control Unit for actuating the pump(s).

Delivery: System completely assembled.



- **Accessories:** Sampling chamber, *SonicControl* level sensing system page 331 – 334; lifting stations see chapter "3"
- **Technical note** page 330



without *SonicControl*

NS	Art. no.
NS 15	93 015.01/MS
NS 20	93 020.01/MS
NS 25	93 025.01/MS
NS 30	93 030.01/MS

Pumping capacity

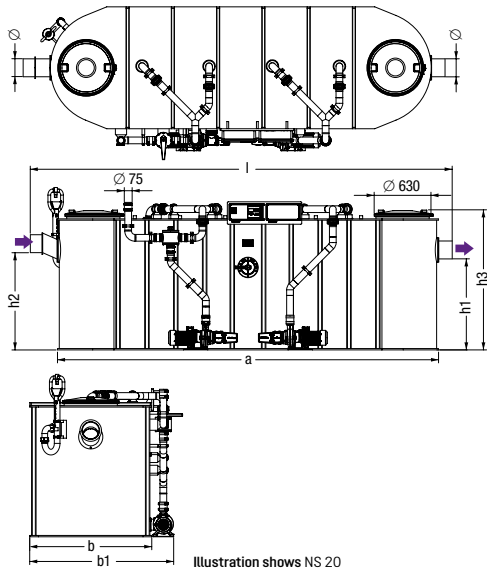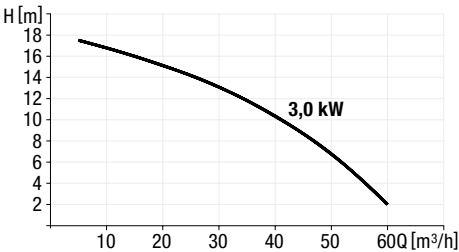

NS	Ø	a	Installation dimension l × b	b1	h1	h2	h3	Sludge trap	Water and sludge	Grease storage	Total (incl. water)
15	200	3300	3560 × 1350	1620	1130	1200	1625	1500 l	1100 l	600 l	2600 l
20	200	4250	4510 × 1350	1620	1030	1100	1525	2000 l	1370 l	800 l	3370 l
25	200	4500	4760 × 1350	1620	1030	1100	1525	2500 l	1200 l	1000 l	3700 l
30	250	4600	4860 × 1350	1620	1170	1240	1655	3000 l	1370 l	1200 l	4370 l