

Grease separator *EasyClean Modular* Standard and Direct NS 0.25 – 4  
for free-standing installation, two component version



Made of polyethylene

**Installation:** In frost-protected rooms

**Version:** Can be disassembled

**Delivery:** System completely assembled  
(only NS 0.25/NS 0.5/NS 1)

**Note for NS 0.25/NS 0.5/NS 1:** The separated grease must be skimmed off daily in the case of weekly emptying and cleaning.

**\*Custom made product:** Delivery time on request

➤ **Accessories for NS 2/NS 3/NS 4:** Sampling chamber, refill inlet, inspection window, *SonicControl* from page 331 – 334; lifting stations see chapter "3"

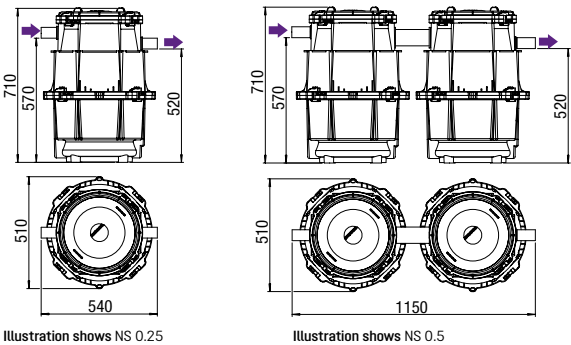


Illustration shows NS 0.25

Illustration shows NS 0.5

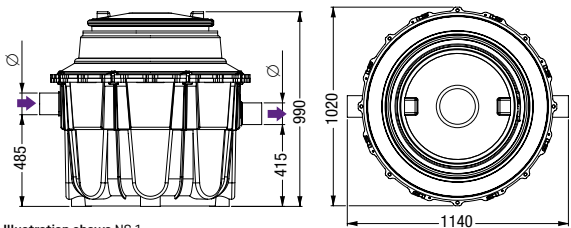


Illustration shows NS 1

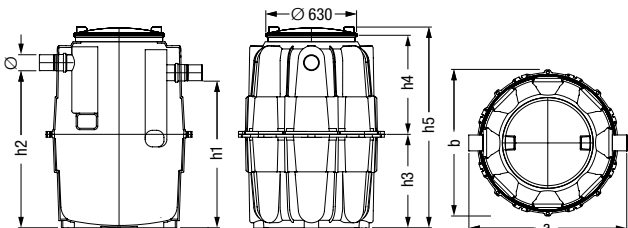


Illustration shows NS 2



Illustration shows  
Art. no. 93 025

Illustration shows  
Art. no. 93 050

Illustration shows  
Art. no. 93 001



Illustration shows Art. no. 93 002-R

*EasyClean Modular Standard*

NS	Art. no.
NS 0.25	93 025
NS 0.5	93 050
NS 1	93 001
NS 2	93 002-R*
NS 3	93 003-R*
NS 4	93 004-R*

*EasyClean Modular Direct*  
with direct disposal

NS	Art. no.
NS 2	93 002.00/D1-R*
NS 3	93 003.00/D1-R*
NS 4	93 004.00/D1-R*

\*Custom made

NS	Ø	a	b	h1	h2	h3	h4	h5	Weight	Sludge trap	Water and sludge	Grease storage
0.25	50	-	-	-	-	-	-	-	20 kg	25 l	28 l	15 l
0.5	50	-	-	-	-	-	-	-	45 kg	50 l	42 l	30 l
1	110	-	-	-	-	-	-	-	65 kg	100 l	100 l	40 l
2	110	1100	1020	1020	1090	650	690	1395	60 kg	200 l	400 l	100 l
3	110	1100	1020	1020	1090	650	690	1395	60 kg	300 l	300 l	120 l
4	110	1400	1300	1090	1160	765	790	1620	110 kg	400 l	560 l	160 l

NS 0.25/NS 0.5/NS 1: KESSEL-Norm      NS 2/NS 3/NS 4: EN 1825

Ø = Outer diameter