


## Fittings

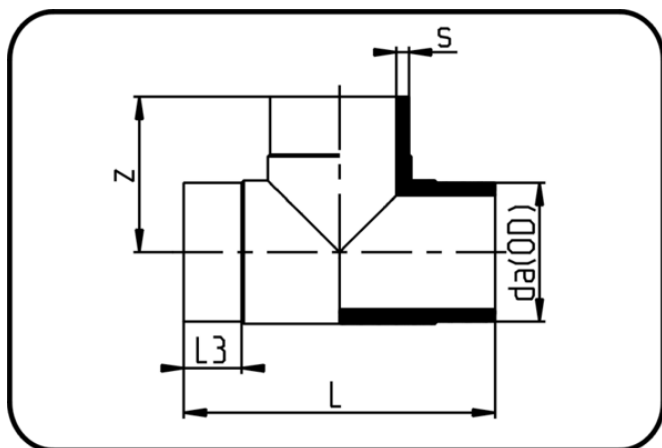

Code: 006

- Tee
- short spigot
- injection moulded
- Butt + IR + HPF-welding
- PVDF natural

Dimension	Code	Detail	da(OD) mm	s mm	z mm	L mm	L3 mm	Weight
90	30.006.0090.33	90X2,8 SDR33 ISO S-16	90	2,8	92	185	33,5	0.468
110	30.006.0110.33	110X3,4 SDR33 ISO S-16	110	3,4	110	221	33,5	0.892
125	30.006.0125.33	125X3,9 SDR33 ISO S-16	125	3,9	139	279	52	1.21
140	30.006.0140.33	140X4,3 SDR33 ISO S-16	140	4,3	154	308	60	1.715
160	30.006.0160.33	160X4,9 SDR33 ISO S-16	160	4,9	140	279	45	1.92
180	30.006.0180.33	180X5,5 SDR33 ISO S-16	180	5,5	200	400	80	3.28
200	30.006.0200.33	200X6,2 SDR33 ISO S-16	200	6,2	223	446	89	5.53
225	30.006.0225.33	225X6,9 SDR33 ISO S-16	225	6,9	246	496	99	6.72
250	30.006.0250.33	250X7,7 SDR33 ISO S-16	250	7,7	250	500	80	8.235
280	30.006.0280.33	280X8,6 SDR33 ISO S-16	280	8,6	248	495	70	9.9
315	30.006.0315.33	315X9,7 SDR33 ISO S-16	315	9,7	247	496	57	12.06
20	30.006.0020.21	20X1,9 SDR21 ISO S-10	20	1,9	38	75	25	0.023
25	30.006.0025.21	25X1,9 SDR21 ISO S-10	25	1,9	42	84	25	0.032
32	30.006.0032.21	32X2,4 SDR21 ISO S-10	32	2,4	46	90	25	0.06
40	30.006.0040.21	40X2,4 SDR21 ISO S-10	40	2,4	58	116	31	0.094
50	30.006.0050.21	50X3,0 SDR21 ISO S-10	50	3	64	126	31	0.154
63	30.006.0063.21	63X3,0 SDR21 ISO S-10	63	3	70	140	31	0.241
75	30.006.0075.21	75X3,6 SDR21 ISO S-10	75	3,6	89	178	42	0.382
90	30.006.0090.21	90X4,3 SDR21 ISO S-10	90	4,3	92	185	33,5	0.618
110	30.006.0110.21	110X5,3 SDR21 ISO S-10	110	5,3	110	221	33,5	1.15
125	30.006.0125.21	125X6,0 SDR21 ISO S-10	125	6	139	279	52	1.65
140	30.006.0140.21	140X6,7 SDR21 ISO S-10	140	6,7	154	308	60	2.291
160	30.006.0160.21	160X7,7 SDR21 ISO S-10	160	7,7	140	279	45	2.64

Dimension	Code	Detail	da(OD) mm	s mm	z mm	L mm	L3 mm	Weight
180	30.006.0180.21	180X8,6 SDR21 ISO S-10	180	8,6	200	400	80	4.65
200	30.006.0200.21	200X9,6 SDR21 ISO S-10	200	9,6	223	446	89	7.085
225	30.006.0225.21	225X10,8 SDR21 ISO S-10	225	10,8	246	496	99	9.3
250	30.006.0250.21	250X11,9 SDR21 ISO S-10	250	11,9	250	500	80	11.4
280	30.006.0280.21	280X13,4 SDR21 ISO S-10	280	13,4	248	495	70	13.89