


PVCC Plain Fittings Inch Sizes

Reducing Tee 90°

Socket x Socket x Socket

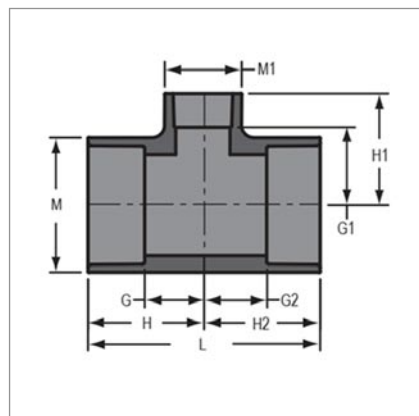

Size	Code	G	G1	G2	H	H1	H2	L	M	M1	Approx Wt. (grams)
3/4x3/4x1/2	801-101C	15.08	18.25	15.08	40.48	40.48	40.48	80.96	35.72	30.16	63.00
1x1x1/2	801-130C	15.08	22.23	15.08	43.65	44.45	43.65	87.31	44.45	30.16	90.00
1x1x3/4	801-131C	17.46	21.43	17.46	46.83	46.83	46.83	92.87	44.45	35.72	103.50
1 1/4x1x1	801-158C	10.32	23.81	10.32	53.98	50.00	49.21	101.60	52.39	42.86	148.50
1 1/4x1x1 1/4	801-159C	23.81	26.19	22.23	55.56	54.77	53.98	109.54	52.39	52.39	175.50
1 1/4x1 1/4x1/2	801-166C	22.23	35.72	22.23	53.18	60.33	53.18	107.15	53.98	44.45	189.00
1 1/4x1 1/4x3/4	801-167C	15.88	24.60	15.88	49.21	50.00	49.21	98.43	53.98	35.72	126.00
1 1/4x1 1/4x1	801-168C	21.43	26.19	21.43	53.18	54.77	53.18	107.15	53.18	44.45	153.00
1 1/2x1 1/4x1	801-202C	22.23	30.95	22.23	57.15	59.53	57.15	114.30	61.91	46.04	180.00
1 1/2x1 1/2x1/2	801-209C	14.29	26.99	14.29	50.00	49.21	50.00	100.01	60.33	30.16	144.00
1 1/2x1 1/2x3/4	801-210C	17.46	26.19	17.46	52.39	51.59	52.39	105.57	59.53	35.72	166.50
1 1/2x1 1/2x1	801-211C	21.43	29.37	21.43	62.70	58.74	62.70	125.41	59.53	44.45	189.00
1 1/2x1 1/2x1 1/4	801-212C	30.16	30.16	30.16	65.09	61.91	65.09	130.18	60.33	53.98	243.00
2x2x1/2	801-247C	14.29	35.72	14.29	53.18	57.94	53.18	106.36	73.03	29.37	198.00
2x2x3/4	801-248C	17.46	35.72	17.46	55.56	61.12	55.56	111.13	72.23	35.72	234.00
2x2x1	801-249C	21.43	36.51	21.43	60.33	65.09	60.33	120.65	73.03	44.45	261.00
2x2x1 1/4	801-250C	24.60	34.13	24.60	64.29	65.88	64.29	129.38	73.03	53.98	270.00
2x2x1 1/2	801-251C	29.37	35.72	29.37	68.26	71.44	68.26	136.53	74.61	62.70	346.50
2 1/2x2 1/2x1/2	801-287C	15.08	40.48	15.08	60.33	62.70	60.33	119.85	88.90	30.16	351.00
2 1/2x2 1/2x3/4	801-288C	16.67	38.10	16.67	61.91	64.29	61.91	123.03	89.69	35.72	373.50
2 1/2x2 1/2x1	801-289C	21.43	43.65	21.43	66.68	72.23	66.68	133.35	89.69	43.65	445.50
2 1/2x2 1/2x1 1/4	801-290C	26.19	44.45	26.19	72.23	76.20	72.23	144.46	90.49	53.18	499.50
2 1/2x2 1/2x1 1/2	801-291C	29.37	43.65	29.37	75.40	79.38	75.40	150.02	90.49	60.33	544.50
2 1/2x2 1/2x2	801-292C	35.72	41.28	35.72	80.96	79.38	80.96	161.93	88.90	73.03	594.00
3x3x1/2	801-333C	36.51	73.03	36.51	84.14	95.25	84.14	168.28	106.36	73.03	873.00
3x3x3/4	801-334C	36.51	68.26	36.51	84.14	93.66	84.14	168.28	106.36	73.03	864.00
3x3x1	801-335C	22.23	50.80	22.23	69.85	79.38	69.85	139.70	107.15	44.45	558.00
3x3x1 1/4	801-336C	41.28	49.21	41.28	84.14	92.08	84.14	168.28	106.36	73.03	850.50
3x3x1 1/2	801-337C	29.37	52.39	29.37	77.79	87.31	77.79	155.58	106.36	60.33	648.00
3x3x2	801-338C	36.51	46.04	36.51	84.14	84.14	84.14	168.28	107.15	73.03	742.50
3x3x2 1/2	801-339C	44.45	50.00	44.45	92.08	93.66	92.08	184.15	106.36	89.69	846.00
4x4x1/2	801-415C	36.51	89.69	36.51	93.66	111.92	93.66	186.53	133.35	73.03	1,179.00
4x4x3/4	801-416C										
4x4x1	801-417C	37.30	83.34	37.30	93.66	111.13	93.66	187.33	132.55	73.03	1,147.50
4x4x1 1/4	801-418C	28.58	75.40	28.58	86.52	107.15	86.52	172.24	133.35	60.33	981.00
4x4x1 1/2	801-419C	28.58	65.09	28.58	85.73	100.01	85.73	171.45	133.35	60.33	940.50
4x4x2	801-420C	36.51	63.50	36.51	93.66	101.60	93.66	187.33	133.35	73.03	1,057.50
4x4x3	801-422C	53.98	69.05	53.98	111.13	116.68	111.13	223.04	133.35	106.36	1,399.50
6x6x1	801-525C	21.43	94.45	21.43	98.43	123.03	98.43	196.85	192.09	44.45	1,953.00


* Max pressure rating 10bar at 20°C

Please note: This information is based on current manufacturers details, and is subject to change without notification.

PVCC Plain Fittings Inch Sizes

Reducing Tee 90°

Socket x Socket x Socket

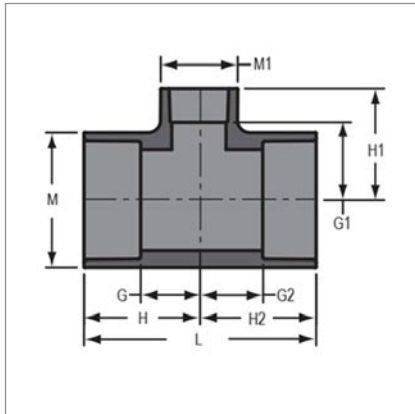

Size	Code	G	G1	G2	H	H1	H2	L	M	M1	Approx Wt. (grams)
6x6x1 1/4	801-526C	36.51	4.76	36.51	112.71	138.90	112.71	225.43	192.88	73.03	2,353.50
6x6x2 1/2	801-527C	36.51	103.98	36.51	112.71	139.70	112.71	225.43	192.88	73.03	2,362.50
6x6x2	801-528C	36.51	94.45	36.51	112.71	133.35	112.71	225.43	192.88	73.03	2,299.50
6x6x3	801-530C	52.39	95.25	52.39	129.38	142.88	129.38	258.76	192.88	107.95	2,916.00
6x6x4	801-532C	68.26	94.45	68.26	144.46	151.60	144.46	289.72	192.88	133.35	3,460.50
8x8x2	801-578C	96.84	168.28	96.84	198.44	206.38	198.44	396.88	246.06	192.09	7,902.00
8x8x3	801-580C	94.45	165.10	94.45	196.85	212.73	196.85	393.70	246.06	190.50	7,663.50
8x8x4	801-582C	66.68	123.03	66.68	168.28	180.18	168.28	336.55	247.65	134.14	5,202.00
8x8x6	801-585C	97.63	122.24	97.63	200.82	199.23	200.82	402.43	246.85	192.09	6,984.00
10x10x2	801-621CF*	111.13	180.98	111.13	244.48	225.43	241.48	488.95	303.21	71.44	9,702.00
10x10x3	801-623C*	96.04	191.29	96.04	238.13	238.13	238.13	477.04	306.39	192.09	12,001.50
10x10x4	801-624C*	98.43	182.56	98.43	238.13	238.30	238.13	476.25	306.39	192.09	11,862.00
10x10x6	801-626C*	98.43	148.43	98.43	238.13	224.63	238.13	476.25	306.39	192.09	10,575.00
10x10x8	801-628C*	150.81	196.85	150.81	290.51	298.45	290.51	581.03	306.39	306.39	19,377.00
12x12x2	801-661CF*	120.65	203.20	120.65	279.40	247.65	279.40	558.80	358.78	71.44	13,068.00
12x12x3	801-663CF*	133.35	217.49	133.35	292.10	274.64	292.10	584.20	358.78	104.78	14,517.00
12x12x4	801-664CF*	110.33	257.18	110.33	277.81	314.33	277.81	555.63	361.95	246.85	14,787.00
12x12x6	801-666C*	184.15	252.41	184.15	336.55	334.96	336.55	673.10	358.78	190.50	20,416.50
12x12x8	801-668C*	123.03	190.50	123.03	289.72	282.58	289.72	579.44	361.95	246.85	18,000.00
12x12x8	801-670C*	260.35	274.64	260.35	419.10	407.99	419.10	838.20	358.78	303.21	30,231.00

* Max pressure rating 10bar at 20°C

Please note: This information is based on current manufacturers details, and is subject to change without notification.