


PVCC Plain Fittings Inch Sizes Elbow 45°

Socket x Socket

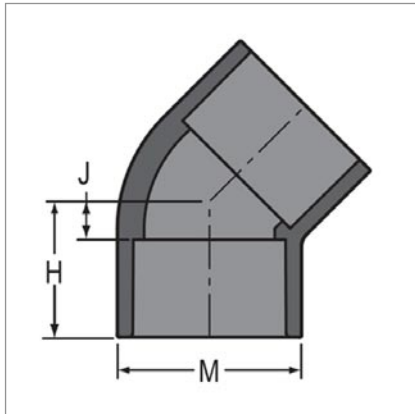

Size	Code	H	J	M	Approx Wt. (grams)
1/4	817-002C	20.64	3.97	21.43	13.50
3/8	817-003C	24.60	5.55	25.40	18.00
1/2	417-005C	28.58	6.35	30.16	27.00
3/4	817-007C	33.34	7.94	36.51	40.50
1	817-010C	36.51	7.94	43.65	67.50
1 1/4	817-012C	41.28	9.53	53.98	103.50
1 1/2	817-015C	46.04	11.11	60.33	135.00
2	817-020C	53.98	15.88	73.03	207.00
2 1/2	817-025C	61.12	16.67	88.90	346.50
3	817-030C	73.82	23.02	105.57	504.00
4	817-040C	84.14	26.99	133.35	900.00
6	817-060C	120.65	44.45	192.88	2,484.00
8	817-080C	152.40	50.80	247.65	4,576.50
10	817-100C*	207.96	65.88	309.56	9,279.00
12	817-120C*	246.06	78.58	365.92	15,318.00
14	817-140CF*	261.94	84.14	396.88	18,000.00
16	817-160CF*	338.14	134.94	449.26	27,652.50

* Max pressure rating 10bar at 20°C

Please note: This information is based on current manufacturers details, and is subject to change without notification.