


## PVCC Plain Fittings Inch Sizes Street Elbow 45°

Spigot x Socket

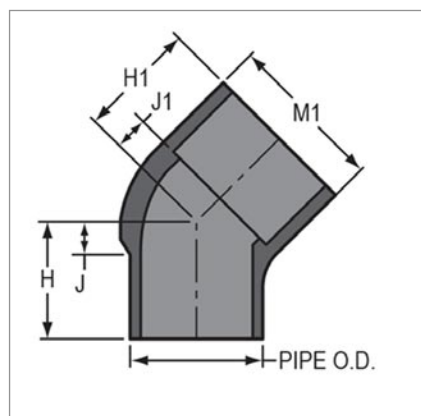

Size	Code	H	H1	J	J1	M1	Approx Wt. (grams)
1/2	827-005C	32.54	33.34	8.73	11.11	30.16	27.00
3/4	827-007C	38.10	38.10	11.11	12.70	35.72	45.00
1	827-010C	45.24	38.10	15.08	9.53	44.45	67.50
1 1/4	827-012C	50.80	43.65	15.88	11.90	53.18	99.00
1 1/2	827-015C	51.59	53.98	15.08	19.84	59.53	135.00
2	827-020C	58.74	59.53	17.46	9.53	72.23	198.00
3	827-030C	82.55	71.44	30.16	23.02	105.57	549.00
4	827-040C	96.84	96.84	39.69	39.69	133.35	967.50
6	827-060C	129.38	121.44	52.39	52.39	192.88	2,565.00
8	827-080C	168.28	151.60	65.88	44.45	247.65	4,738.50
10	827-100C*	270.67	207.96	65.88	134.94	309.56	11,529.00
12	827-120C*	336.55	246.06	161.93	78.58	365.92	20,448.00
14	827-140CF*	293.69	293.69	115.89	115.89	393.70	27,468.00
16	827-160CF*	465.14	338.14	236.54	134.94	449.26	35,280.00

\* Max pressure rating 10bar at 20°C

Please note: This information is based on current manufacturers details, and is subject to change without notification.