


PVCC Plain Fittings Inch Sizes

Elbow 22 $\frac{1}{2}$ °

Socket x Socket

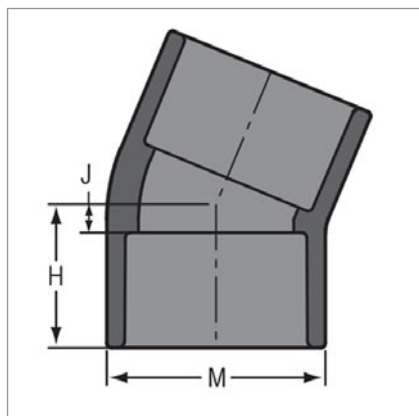

Size	Code	H	J	M	Approx Wt. (grams)
1/2	816-005C	26.99	4.76	29.37	27.00
3/4	816-007C	30.16	4.76	36.51	40.50
1	816-010C	34.93	7.14	43.65	58.50
1 1/4	816-012C	38.10	7.94	53.18	85.50
1 1/2	816-015C	42.07	6.35	60.33	117.00
2	816-020C	47.63	11.11	73.03	171.00
3	816-030C	61.12	14.29	105.57	427.50
4	816-040C	73.03	15.88	133.35	738.00
6	816-060C	115.89	34.93	188.91	1,948.50
8	816-080C	128.59	26.19	247.65	3,685.50
10	816-100CF	185.74	52.39	303.21	7,762.50
12	816-120CF	217.49	58.74	358.78	11,713.50
14	816-140CF*	249.24	71.44	393.70	15,592.50
16	816-160CF*	287.34	84.14	449.26	23,836.50

* Max pressure rating 10bar at 20°C

Please note: This information is based on current manufacturers details, and is subject to change without notification.