


PVCC Plain Fittings Inch Sizes

Reducing Socket

Concentric - Socket x Socket

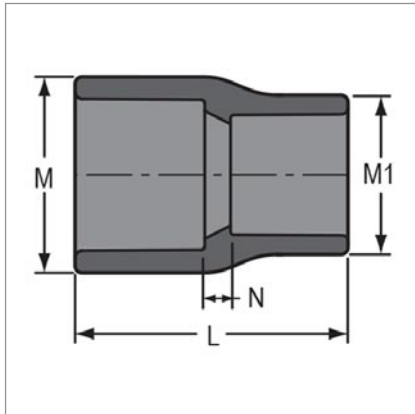

Size	Code	L	M	M1	N	Approx Wt. (grams)
3/4x1/2	829-101C	53.18	35.72	29.37	5.55	31.50
1x1/2	829-130C	55.56	43.65	35.72	5.55	49.50
1x3/4	829-131C	61.12	43.65	35.72	6.35	45.00
1 1/4x1/2	829-166C	65.09	53.18	29.37	11.11	58.50
1 1/4x3/4	829-167C	65.88	53.18	41.28	8.73	76.50
1 1/4x1	829-168C	68.26	53.98	44.45	7.94	76.50
1 1/2x1/2	829-209C	72.23	59.53	30.16	15.08	85.50
1 1/2x3/4	829-210C	73.03	60.33	35.72	13.49	94.50
1 1/2x1	829-211C	73.03	59.53	49.21	9.53	117.00
1 1/2x1 1/4	829-212C	71.44	61.12	53.98	3.97	99.00
2x1/2	829-247C	78.58	73.03	29.37	17.46	135.00
2x3/4	829-248C	81.75	73.03	35.72	18.25	135.00
2x1	829-249C	79.38	73.03	43.65	13.49	148.50
2x1 1/4	829-250C	84.93	73.03	53.18	15.08	139.50
2x1 1/2	829-251C	81.75	72.23	59.53	6.35	135.00
2 1/2x1 1/2	829-291C	95.25	88.90	60.33	15.08	229.50
2 1/2x2	829-292C	92.87	88.10	72.23	10.32	216.00
3x1	829-335C	112.71	104.78	73.03	36.51	450.00
3x1 1/4	829-336C	107.15	105.57	73.82	26.99	423.00
3x1 1/2	829-337C	88.90	106.36	60.33	5.55	319.50
3x2	829-338C	101.60	105.57	73.03	15.88	333.00
3x2 1/2	829-339CF	152.40	103.19	87.31	44.45	405.00
4x3/4	829-416C	145.25	134.14	73.82	61.12	751.50
4x1	829-417C	150.81	134.14	73.82	64.29	769.50
4x1 1/2	829-419C	145.25	134.14	73.82	52.39	715.50
4x2	829-420C	139.70	134.14	73.03	45.24	652.50
4x3	829-422C	116.68	133.35	106.36	11.90	562.50
5x4	829-490CF*	196.85	158.75	131.76	63.50	940.50
6x2	829-528CF*	179.39	190.50	127.00	65.09	1,966.50
6x3	829-530CF	233.36	185.74	131.76	100.01	1,732.50
6x4	829-532C	168.28	193.68	134.94	36.51	1,476.00
8x4	829-582CF*	371.48	241.30	131.76	206.38	3,676.50
8x6	829-585C	203.20	244.65	190.50	25.40	2,772.00
10x4	829-624CF*	536.58	298.45	131.76	346.08	7,708.50
10x6	829-626CF*	444.50	298.45	190.50	228.60	6,624.00
10x8	829-628CF*	336.55	298.45	244.48	95.25	5,139.00
12x4	829-664CF*	720.73	354.01	131.76	504.83	14,265.00
12x6	829-666CF*	628.65	354.01	190.50	387.35	12,132.00
12x8	829-668CF*	520.70	354.01	244.48	254.00	10,953.00
12x10	829-670CF*	415.93	354.01	303.21	123.83	8,514.00

* Max pressure rating of 10bar at 20°C

Please note: This information is based on current manufacturers details, and is subject to change without notification.