


## PVCC Plain Fittings Inch Sizes

### Reducing Socket

Eccentric - Socket x Socket

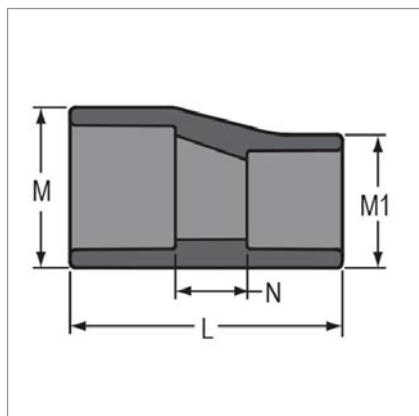

Size	Code	L	M	M1	N	Approx Wt. (grams)
3x2	429-338CFE	149.23	105.57	73.03	62.70	454.50
4x2	429-420CFE	336.55	130.18	71.44	234.95	424.30
4x3	429-422CFE	222.25	130.18	104.78	107.95	765.00
6x2	829-528CFE	530.23	185.74	71.44	403.23	2,637.00
6x3	829-530CFE	415.93	185.74	104.78	276.23	2,808.00
6x4	429-532CFE	282.58	185.74	131.76	142.88	1,525.50
8x4	429-582CFE	530.23	241.30	131.76	365.13	5,193.00
8x6	429-585CFE	387.35	241.30	190.50	196.85	3,784.50
10x4	429-624CFE	812.80	298.45	131.76	622.30	11,443.50
10x6	429-626CFE	669.93	298.45	190.50	454.03	10,039.50
10x8	429-628CFE	458.79	298.45	244.48	217.49	6,651.00
12x6	429-666CFE	962.03	354.01	190.50	720.73	15,898.50
12x8	429-668CFE	750.89	354.01	244.48	484.19	14,706.00
12x10	429-670CFE	523.88	354.01	303.21	231.78	11,200.50

Please note: This information is based on current manufacturers details, and is subject to change without notification.