


PVCC Plain Fittings Inch Sizes

Cap

Socket

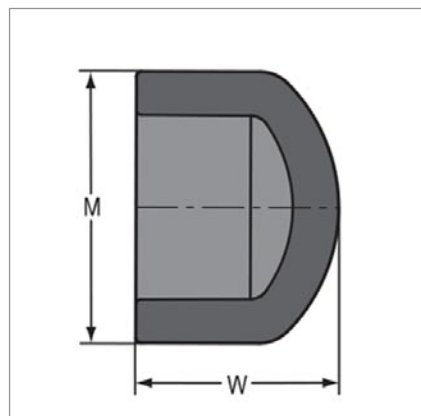

Size	Code	M	W	Approx Wt. (grams)
1/4	847-002C	20.64	23.81	4.50
3/8	847-003C	24.60	28.58	9.00
1/2	847-005C	30.16	30.95	13.50
3/4	847-007C	34.93	35.72	22.50
1	847-010C	43.65	41.28	36.00
1 1/4	847-012C	53.18	46.83	72.00
1 1/2	847-015C	59.53	50.80	72.00
2	847-020C	73.03	57.15	112.50
2 1/2	847-025C	89.69	66.68	216.00
3	847-030C	105.57	76.99	315.00
4	847-040C	133.35	91.28	540.00
6	847-060C	190.50	123.83	1,426.50
8	847-080C	246.85	161.93	2,745.00
10	847-100CF*	311.15	150.81	3,717.00
12	847-120CF*	361.95	180.98	5,085.50
14	847-140CF*	390.53	187.33	6,592.50
16	847-160CF*	454.03	228.60	10,548.00

* Max pressure rating of 10bar at 20°C

Please note: This information is based on current manufacturers details, and is subject to change without notification.