


## PVCC Adaptor Fittings Inch Sizes Socket

Plain Socket x Reinforced NPT Female Thread

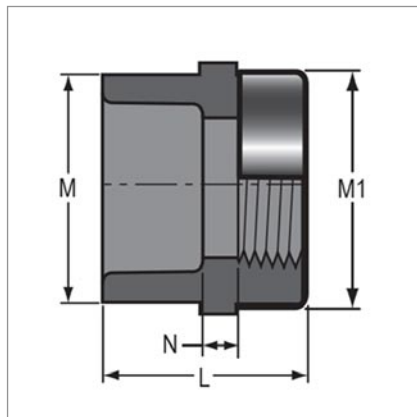

Size	Code	L	M	M1	N	Approx Wt. (grams)
1/4	835-002CSR	35.72	21.43	21.43	2.38	13.50
3/8	835-003CSR	37.30	23.81	24.60	2.38	18.00
1/2	835-005CSR	44.45	29.37	30.16	4.76	27.00
1/2x3/4	835-074CSR	44.45	30.16	34.93	5.55	31.50
3/4x1/2	835-101CSR	47.63	34.93	30.16	4.76	31.50
3/4	835-007CSR	47.63	35.72	34.93	2.38	36.00
3/4x1	835-102CSR	52.39	36.51	42.86	5.55	54.00
1	835-010CSR	53.98	42.86	43.65	2.38	58.50
1x1/2	835-130CSR	50.80	42.86	30.16	5.55	45.00
1x3/4	835-131CSR	53.18	44.45	34.93	6.35	54.00
1 1/4	835-012CSR	58.74	53.18	52.39	2.38	81.00
1 1/2	835-015CSR	61.91	61.12	61.91	5.55	117.00
2	835-020CSR	69.05	76.20	76.99	6.35	198.00
2 1/2	835-025CSR	82.55	90.49	90.49	8.73	306.00
3	835-030CSR	88.90	107.95	108.74	5.55	432.00
4	835-040CSR	100.80	132.55	133.35	5.55	580.50
6	835-060CSR	126.20	193.68	194.47	6.35	1,426.50

Please note: This information is based on current manufacturers details, and is subject to change without notification.