


Fittings for Socket Welding

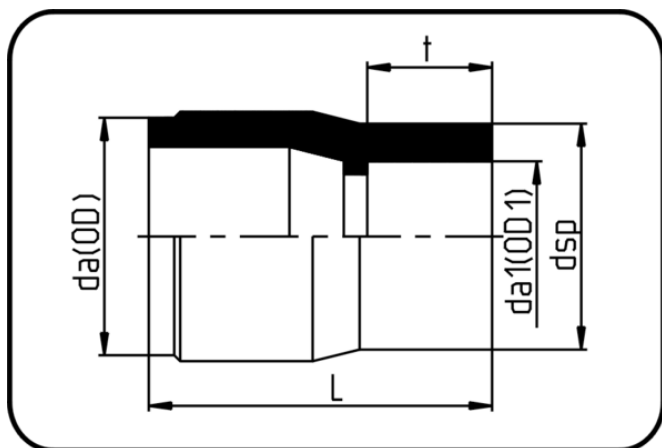

Code: 057

- Reducer concentric
- injection moulded
- Socket-welding
- PPR grey

Dimension	Code	Detail	da(OD) mm	da1(OD 1) mm	L mm	dsp mm	t mm	p bar	Weight
25/20	11.057.2520.07	25/20 - MOP 20 bar	25	20	39	29,5	16	10	0.011
32/20	11.057.3220.07	32/20 - MOP 20 bar	32	20	44,5	29	16	10	0.014
32/25	11.057.3225.07	32/25 - MOP 20 bar	32	25	45	34,5	17	10	0.018
40/20	11.057.4020.07	40/20 - MOP 20 bar	40	20	50	29,5	15	10	0.022
40/25	11.057.4025.07	40/25 - MOP 20 bar	40	25	50	34,5	17	10	0.024
40/32	11.057.4032.07	40/32 - MOP 20 bar	40	32	50	42,8	19	10	0.027
50/20	11.057.5020.07	50/20 - MOP 20 bar	50	20	55,5	29,4	16	10	0.033
50/25	11.057.5025.07	50/25 - MOP 20 bar	50	25	55	34,7	18	10	0.034
50/32	11.057.5032.07	50/32 - MOP 20 bar	50	32	55	42,5	18,1	10	0.037
50/40	11.057.5040.07	50/40 - MOP 20 bar	50	40	54,5	52,8	26	10	0.043
63/25	11.057.6325.07	63/25 - MOP 20 bar	63	25	65	34,8	18	10	0.054
63/32	11.057.6332.07	63/32 - MOP 20 bar	63	32	65	42,9	18,5	10	0.059
63/40	11.057.6340.07	63/40 - MOP 20 bar	63	40	64,5	52,8	21,5	10	0.065
63/50	11.057.6350.07	63/50 - MOP 20 bar	63	50	65	64,8	25	10	0.076
75/63	11.057.7563.07	75/63 - MOP 16 bar	75	63	64	81,5	29	10	0.105
90/63	11.057.9063.07	90/63 - MOP 16 bar	90	63	87,5	81,5	29	10	0.16
90/75	11.057.9075.07	90/75 - MOP 16 bar	90	75	86,6	93	32	10	0.184
110/63	11.057.1163.07	110/63 - MOP 10 bar	110	63	90	81,2	29	10	0.252
110/90	11.057.1190.07	110/90 - MOP 10 bar	110	90	88	113	37	10	0.303