


Fittings for Socket Welding

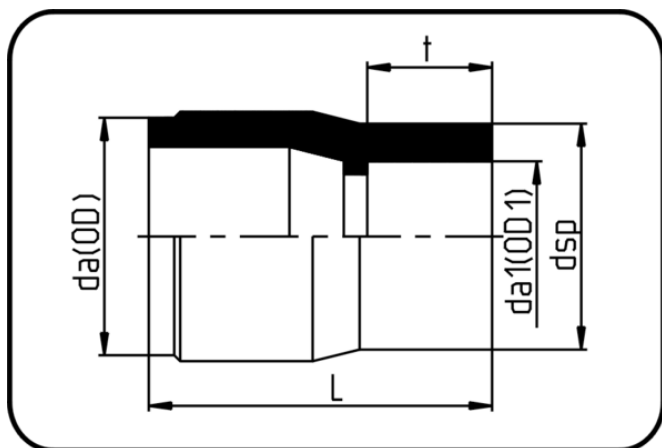

Code: 057

- Reducer concentric
- injection moulded
- Socket-welding
- PE 100-RC black

Dimension	Code	Detail	da(OD) mm	da1(OD 1) mm	L mm	dsp mm	t mm	p bar	Weight
25/20	70.057.2520.07	25/20 - MOP 16 bar	25	20	39	29,5	16	16	0.012
32/20	70.057.3220.07	32/20 - MOP 16 bar	32	20	44,5	29	16	16	0.016
32/25	70.057.3225.07	32/25 - MOP 16 bar	32	25	45	34,5	17	16	0.017
40/20	70.057.4020.07	40/20 - MOP 16 bar	40	20	50	29,5	15	16	0.023
40/25	70.057.4025.07	40/25 - MOP 16 bar	40	25	50	34,5	17	16	0.026
40/32	70.057.4032.07	40/32 - MOP 16 bar	40	32	50	42,8	19	16	0.03
50/20	70.057.5020.07	50/20 - MOP 16 bar	50	20	55,5	29,4	16	16	0.036
50/25	70.057.5025.07	50/25 - MOP 16 bar	50	25	55	34,7	18	16	0.04
50/32	70.057.5032.07	50/32 - MOP 16 bar	50	32	55	42,5	18,1	16	0.039
50/40	70.057.5040.07	50/40 - MOP 16 bar	50	40	54,5	52,8	26	16	0.044
63/25	70.057.6325.07	63/25 - MOP 16 bar	63	25	64	34,8	18	16	0.059
63/32	70.057.6332.07	63/32 - MOP 16 bar	63	32	65	42,9	18,6	16	0.06
63/40	70.057.6340.07	63/40 - MOP 16 bar	63	40	64	52,8	21,5	16	0.069
63/50	70.057.6350.07	63/50 - MOP 16 bar	63	50	65	64,8	25	16	0.081
75/63	70.057.7563.07	75/63 - MOP 16 bar	75	63	64	81,5	29	16	0.107
90/63	70.057.9063.07	90/63 - MOP 16 bar	90	63	86,5	80,8	29	16	0.18
90/75	70.057.9075.07	90/75 - MOP 16 bar	90	75	86,6	93	32	16	0.198
110/63	70.057.1163.07	110/63 - MOP 16 bar	110	63	90	81,2	29	16	0.27
110/90	70.057.1190.07	110/90 - MOP 16 bar	110	90	88	113	37	16	0.302