


## Fittings with short Spigot

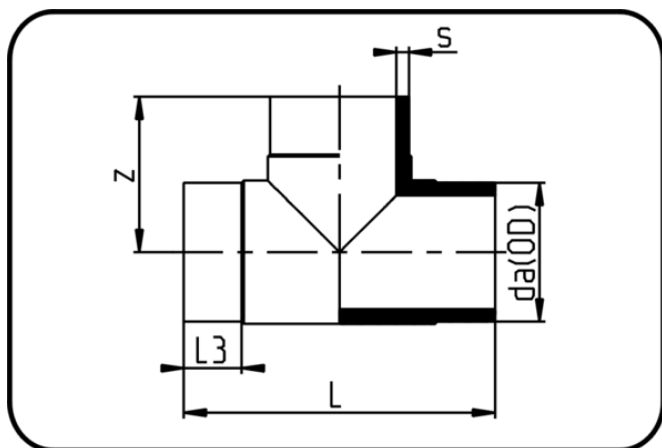

Code: 006

- Tee
- short spigot
- injection moulded
- Butt-welding
- PE 100-RC black

Dimension	Code	Detail	da(OD) mm	s mm	z mm	L mm	L3 mm	Weight
110	70.006.0110.33	110X3,4 SDR33 ISO S-16	110	3,4	109	223	33	0.664
125	70.006.0125.33	125X3,9 SDR33 ISO S-16	125	3,9	115	230	40	0.53
140	70.006.0140.33	140X4,3 SDR33 ISO S-16	140	4,3	125	253	25	1.08
160	70.006.0160.33	160X4,9 SDR33 ISO S-16	160	4,9	170	340	57	1.731
180	70.006.0180.33	180X5,5 SDR33 ISO S-16	180	5,5	182,5	365	57	2.36
200	70.006.0200.33	200X6,2 SDR33 ISO S-16	200	6,2	200	400	57	3.14
225	70.006.0225.33	225X6,9 SDR33 ISO S-16	225	6,9	217,5	435	57	4.34
250	70.006.0250.33	250X7,7 SDR33 ISO S-16	250	7,7	237	475	70	7.1
280	70.006.0280.33	280X8,6 SDR33 ISO S-16	280	8,6	270	540	80	8.45
315	70.006.0315.33	315X9,7 SDR33 ISO S-16	315	9,7	275	550	80	10.98
355	70.006.0355.33	355X10,9 SDR33 ISO S-16	355	10,9	342	684	100	16.98
400	70.006.0400.33	400X12,3 SDR33 ISO S-16	400	12,3	350	700	104	23.4
450	70.006.0450.33	450X13,8 SDR33 ISO S-16	450	13,8	450	900	130	33
500	70.006.0500.33	500X15,3 SDR33 ISO S-16	500	15,3	450	895	130	33.5
63	70.006.0063.17	63X3,8 SDR17 ISO S-8	63	3,8	72	145	25	0.18
75	70.006.0075.17	75X4,5 SDR17 ISO S-8	75	4,5	75	150	16	0.322
90	70.006.0090.17	90X5,4 SDR17 ISO S-8	90	5,4	107	210	38	0.526
110	70.006.0110.17	110X6,6 SDR17 ISO S-8	110	6,6	121	251	50,5	0.914
125	70.006.0125.17	125X7,4 SDR17 ISO S-8	125	7,4	135	270	52	1.38
140	70.006.0140.17	140X8,3 SDR17 ISO S-8	140	8,3	150	300	54	1.845
160	70.006.0160.17	160X9,5 SDR17 ISO S-8	160	9,5	170	340	57	2.54
180	70.006.0180.17	180X10,7 SDR17 ISO S-8	180	10,7	182,5	365	57	3.52
200	70.006.0200.17	200X11,9 SDR17 ISO S-8	200	11,9	200	400	57	4.72

Dimension	Code	Detail	da(OD) mm	s mm	z mm	L mm	L3 mm	Weight
225	70.006.0225.17	225X13,4 SDR17 ISO S-8	225	13,4	220	440	57	6.48
250	70.006.0250.17	250X14,8 SDR17 ISO S-8	250	14,8	235	464	70	8.62
280	70.006.0280.17	280X16,6 SDR17 ISO S-8	280	16,6	267	534	80	12.26
315	70.006.0315.17	315X18,7 SDR17 ISO S-8	315	18,7	275	546	80	15
355	70.006.0355.17	355X21,1 SDR17 ISO S-8	355	21,1	340	680	104	23.64
400	70.006.0400.17	400X23,7 SDR17 ISO S-8	400	23,7	345	695	104	28.5
450	70.006.0450.17	450X26,7 SDR17 ISO S-8	450	26,7	445	890	130	47.5
500	70.006.0500.17	500x29,7 SDR17 ISO S-8	500	29,7	445	890	130	53.5
20	70.006.0020.11	20X2,0 SDR11 ISO S-5	20	2	34	68	17,5	0.013
25	70.006.0025.11	25X2,3 SDR11 ISO S-5	25	2,3	40	80	20,5	0.02
32	70.006.0032.11	32X3,0 SDR11 ISO S-5	32	3	45	90	20,5	0.039
40	70.006.0040.11	40X3,7 SDR11 ISO S-5	40	3,7	50	100	20,5	0.065
50	70.006.0050.11	50X4,6 SDR11 ISO S-5	50	4,6	60	120	23	0.122
63	70.006.0063.11	63X5,8 SDR11 ISO S-5	63	5,8	72	144	25	0.225
75	70.006.0075.11	75X6,8 SDR11 ISO S-5	75	6,8	75	152	15	0.408
90	70.006.0090.11	90X8,2 SDR11 ISO S-5	90	8,2	105	212	38	0.701
110	70.006.0110.11	110X10,0 SDR11 ISO S-5	110	10	122	253	51	1.24
125	70.006.0125.11	125X11,4 SDR11 ISO S-5	125	11,4	140	277	52	1.88
140	70.006.0140.11	140X12,7 SDR11 ISO S-5	140	12,7	152	304	53	2.48
160	70.006.0160.11	160X14,6 SDR11 ISO S-5	160	14,6	170	340	57	3.44
180	70.006.0180.11	180X16,4 SDR11 ISO S-5	180	16,4	182,5	365	57	4.6
200	70.006.0200.11	200X18,2 SDR11 ISO S-5	200	18,2	200	400	57	6.32
225	70.006.0225.11	225X20,5 SDR11 ISO S-5	225	20,5	220	440	57	8.56
250	70.006.0250.11	250X22,7 SDR11 ISO S-5	250	22,7	235	466	72	11.16
280	70.006.0280.11	280X25,4 SDR11 ISO S-5	280	25,4	270	536	80	16.2
315	70.006.0315.11	315X28,6 SDR11 ISO S-5	315	28,6	270	540	80	19.7
355	70.006.0355.11	355X32,2 SDR11 ISO S-5	355	32,2	340	680	105	31.32
400	70.006.0400.11	400X36,3 SDR11 ISO S-5	400	36,3	350	695	103	39.3
450	70.006.0450.11	450X40,9 SDR11 ISO S-5	450	40,9	450	890	130	65.52
500	70.006.0500.11	500X45,4 SDR11 ISO S-5	500	45,4	450	900	130	73.72